



Vertigable[®]





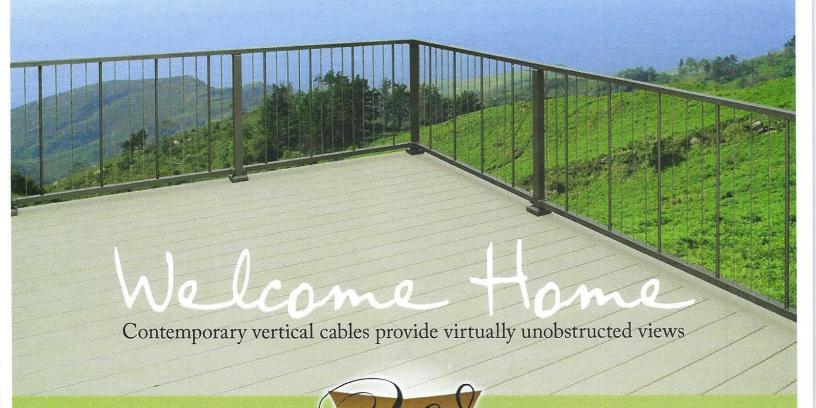




Vertical C.

Style C80

Contemporary vertical cables and balusters provide architectural style with a virtually unobstructed view. Sections are factory assembled, tensioned, and shipped on pallets ready for quick installation. VertiCable® hardware mirrors Westbury® C-Series products providing consistent design, performance, and configuration for the contractor or builder. Available in 12 standard AAMA 2604 compliant powder coated colors. AAMA 2605 and custom colors are available.



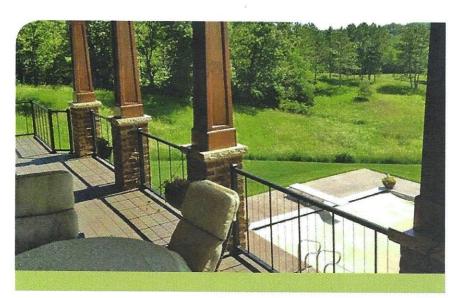



C80 SPECIFICATIONS

- · Section Heights: 36", 42"
- Section Lengths: 4', 5', 6', 7', 8' (7' & 8' in 36" height only)
- · Stair Rail Lengths: 4', 5', 6'
- C80 Baluster: 5/8" round
- Cable Spacing: 3" c/c
- Stylish Top Rail: 1-3/4" w (.090") x 1-3/8" t (.085")
- Bottom Rail: 1-3/4" w (.080") x 1-1/4" t (.080")
- 1/8" Stainless Steel Cable with Fasteners

VertiCable Adjustable Gates



Style: C80 Gates in 36", 48", and 60" widths. 36" x 36" Gate shown above



Style: C80 With Level Crossover Post Offers a Contemporary and Seamless Look. Works well with Westbury Drink Rail. Color: Bronze Fine Texture

Exclusive DSI Powder Coating Process

AAMA 2604 & AAMA 2605






Verified AAMA 2604 Compliant Powder Coating

Westbury Aluminum Railing powder coating is an uncompromising quality created by state-of-the-art technology. This is the highest quality powder coating on the market with a lifetime-limited warranty giving you peace of mind in your investment.



The raw premium-grade aluminum is inspected to be free of blemishes and is not exposed to the outdoor elements.



The product enters a heated acidic cleaning stage to remove extrusion debris and fabrication oils.



CLEAN: City water rinse CLEANER: Recycling reverse osmosis water

CLEANEST: Pure reverse osmosis water rinse SEALER: Dried-in-place aluminum sealer



A 200 MPH air blast removes water drops from the pre-treated aluminum. A convection oven completes the dry-off



Powder is applied with 18 automated and 2 manual spray guns. Compressed process air is dried to -35°F Dew Point for superior adhesion.



The powder coating is then bonded and adhered to the aluminum sub-straight in a 400 degree cure stage.





DSI is a PCI 4000 certified and verified AAMA 2604 and AAMA 2605 compliant powder coating applicator. The powder coating process is accredited by the American Architectural Manufacturing Association and the Powder Coating Institute. Our powder coating is custom blended from a Super Durable Polyester TGIC (Triglycidyl Isocyanurate) resin-base, using premium pigmentation to meet AAMA 2604 specifications. Our AAMA 2605 is a fluorocarbon polymer resin system.



Available Standard Colors




Black Fine Texture



Ninety Bronze



Bronze Fine Texture





White Fine Texture



Speckled Walnut



Sandy Shore





Silver

VertiCable® Accessories Featuring Westbury Brackets, Posts, Welded Corner, Caps, and Flairs

The finishing touch to your masterpiece - Accessories. A variety of post sizes and wall thicknesses add strength to your railing. The standard mounts combined with swivel mounts solve many unique scenarios. Optional post caps finished off by the convenience of 2-piece and 1 piece post flairs, create a variety of looks. All these options create the Westbury Aluminum Railing Accessories.















Residential 2" Post (.090" wall)



2" Heavy Duty Post*‡ (.093" wall)



2-1/2" Power Post*†§ (.125" wall)



4" Smooth Post*† (.125" wall)



4" Deco Post (.090" wall)



6" Deco Post (.090" wall)

Mounts





Wall & Angle Swivel Mounts





Stair Mounts





Stair Swivel Mounts





Double Swivel Stair Mount



*Corner Crossover Post

KONLEX

OSSOVENS




*Stair Crossover Post



*Level Crossover Post




2", 2-1/2" & 4" Post Flair (2-piece) 6" Post Flair (1-piece) Available




Rail Support



Welded Corner







Ball Cap (2", 2-1/2", 4")



MagenaStar Post Cap Light (Low Voltage & Solar)











westburyrailing.com

*Testing Results - CCRR-0163 complies with IBC[†], IRC[‡], and FBC. Note: Please check with local code authorities for requirements.

MIAMIDADE COUNTY

±Patent No. 8,998,175

